




## IEC 60331 Indoor Fire Resistant Armoured Telephone

### Cable

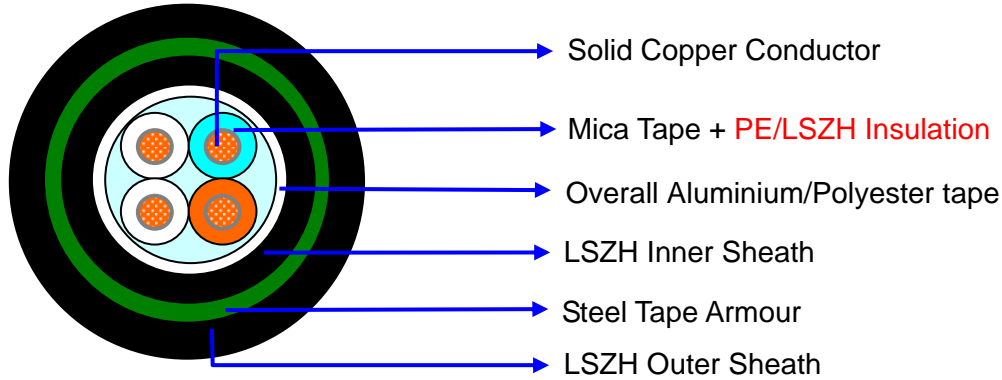

### Application

This cable is used for the internal wiring of building when the circuit integrity during fire is paramount. The cable is intended to take the place of LSZH sheathed cables and will withstand similar environments with a similar working life. It is intended for use in fire fighting plants with mica tapes, with aluminium foil and LSZH outer sheath.

### Fire Performance

- \* **Fire Resistance:** IEC 60331.
- \* **Flame Retardance:** IEC 60332-3C.
- \* **Corrosive and Acid Gas Emission Test:** Hydrochloric acid yield less than 0.5% in accordance with IEC 60754-1&2.
- \* **Smoke Density:** Percentage of light transmitted is greater than 60% when tested in accordance with IEC 61034-1&2.

### Construction

**Conductor:** Solid annealed bare copper sized 0.6mm.

**Fire Barrier:** Mica tape.

**Insulation:** Polyethylene or Low smoke fume zero halogen compound (LSZH).

**Twisting:** Two colored insulated conductors are uniformly twisted together to form a



pair.

**Shape:** Circular

**Screen:** Overall Aluminium/Polyester tape

**Drain Wire:** Solid copper wire sized 0.6mm.

**Inner sheath:** Flame retardant low smoke fume zero halogen compound (LSZH)

**Armour:** Steel tape armour is applied over the inner sheath.

**Outer Sheath:** Flame retardant low smoke fume zero halogen compound (LSZH)

**Sheath color:** Black

**Marking:** The cable is marked with white or other colors as follows:

A) Caledonian Cables Co., Ltd

B) Type and size of cable

C) Manufacturing date

D) Meter Marking

The meter mark is printed every meter with an accuracy of  $\pm 0.5\%$ .

Other printing are available according to customer request.

Table 1. Dimensions

Diameter of Conductor (mm)	Insulation Thickness (mm)	Thickness of Outer Sheath (mm)	Diameter of Cable (mm)	Approx. Weight (kg/km)
1/0.6	0.25?	1.6	18.0 $\pm$ 1.5	380