




### Multicore Overall Screened Cables-Belden Equivalent 9260

#### » Application

These multicore overall screened cables have individually insulated cores laid up in a tinned copper braid screen, suitable for used as control cables.

#### » Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Tinned copper braid, 85% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White, Red, Green, Orange, Blue.

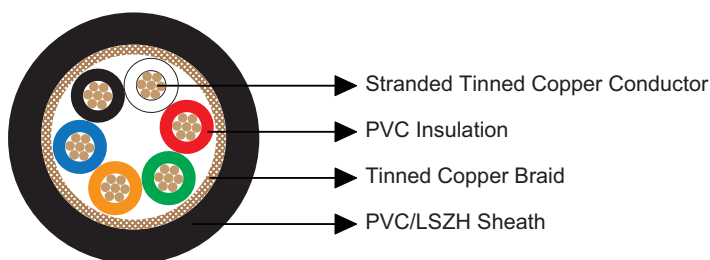

#### » Electrical & Mechanical Characteristics

AWG		20
Conductor Construction		7x0.32
UL Style		2464
Maximum Conductor Resistance	Ω/km	34.1
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	85
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

#### » Dimensions

Ordering Code	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119260V	6	0.41	0.81	7.8
BE119260H	6	0.41	0.81	7.8