



## FRA 155/S Multicore

### Applications

Multicore cable very high resistance to temperature designed for internal wiring in lamps, heating appliances and distribution boxes in apparatus, mechanical and plant engineering, etc. Used for fixed and flexible application in dry, humid and wet rooms.




### Standard

- IEC 60332-1, EN 50265-2-1 (flame retardant)
- EN 50266-2 (non-flame propagating)

### Construction

- **Conductors:** Class 5 stranded tinned copper to IEC60228/VDE 0295.
- **Insulation:** Electron beam crosslinkable polyolefine copolymer.
- **Sheath:** Electron beam crosslinkable polyolefine copolymer.

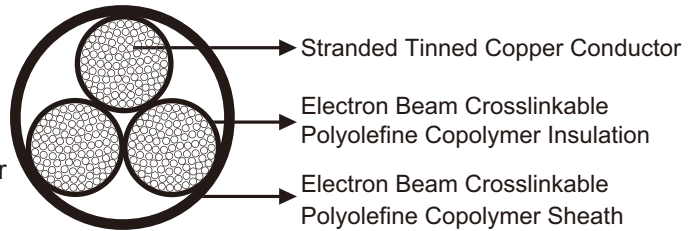

### Electrical Characteristics at 20°C

Nominal Conductor Cross Section	mm <sup>2</sup>	0.25	0.50	0.75	1.0	1.5	2.5
Maximum Conductor Resistance	Ω/km	85.9	40.1	26.7	20.0	13.7	8.21
Voltage Rating	V	450/750V (≤0.5mm <sup>2</sup> ); 600/1000V (>0.5mm <sup>2</sup> )					

### Mechanical and Thermal Properties

Minimum Bending Radius: 4xOD (Static); 6xOD (Flexing)  
 Temperature Range: -55°C ~+155°C (Static); -40°C ~+120°C (Flexing)  
 Short Circuit Temperature: +280°C



## Dimensions and Weight

No. of cores & Nominal Conductor Cross Sectional Area No. x mm <sup>2</sup>	Number and Nominal Diameter of Strands No/mm	Nominal Insulation Thickness mm	Nominal Overall Diameter mm	Nominal Weight kg/km
4x0.25	19/0.13	0.5	5.4	33
3x0.34	19/0.15	0.5	5.1	28
2x0.5	19/0.18	0.5	5.2	30
3x0.5	19/0.18	0.5	5.6	40
8x0.5	19/0.18	0.5	8.8	102
16x0.5	19/0.18	0.5	10.4	166
3x0.75	24/0.20	0.6	6.7	59
4x0.75	24/0.20	0.6	7.5	80
2x1	32/0.20	0.6	7.0	61
3x1	32/0.20	0.6	7.6	77
2x1.5	30/0.25	0.6	7.5	66
3x1.5	30/0.25	0.6	7.9	92
4x1.5	30/0.25	0.6	8.8	117
5x1.5	30/0.25	0.6	10.1	150
3x2.5	50/0.25	0.7	9.9	145
4x2.5	50/0.25	0.7	11.0	186
5x2.5	50/0.25	0.7	12.0	223
5x1.5	30/0.25	0.6	10.1	150
3x2.5	50/0.25	0.7	9.9	145
4x2.5	50/0.25	0.7	11.0	186
5x2.5	50/0.25	0.7	12.0	223




Impact Resistant



Highly Flexible



Weather Resistant



UV Resistant



Fire Retardant  
NF C32-070-2.2(C1)  
IEC 60332-3/EN50266



Flame Retardant  
NF C32-070-2.1(C2)  
IEC 60332-1/EN 50265-2-1