



H05V2-U / H07V2-U

Application and Description


These cables are for fixed protected installation inside appliances and in, or on, lighting fittings. Suitable for installation in surface mounted or embedded conduits, only for signalling and control circuits. Maximum conductor temperature in normal use 90°C. Not to be used in contact with object higher than 85°C. Not suitable for fixed distribution system.

Standard and Approval

<HAR> HD 21.7 S2, VDE-0281 Part-7, CEI20-20/7,
CE Low Voltage Directive 73/23/EEC and 93/68/EEC, ROHS compliant

Cable Construction


- Solid bare copper single wire
- Solid to DIN VDE 0281-3, HD 21.3 S3 and IEC 60227-3
- Special PVC TI3 ore insulation
- Cores to VDE-0293 colors on chart
- H05V-U (20, 18 & 17 AWG)
- H07V-U (16 AWG and Larger)

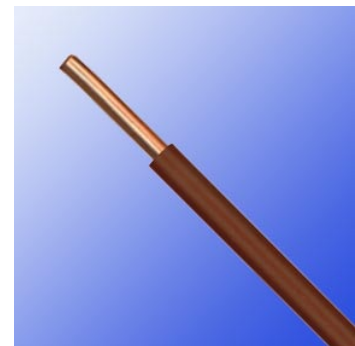

H07V2-U

Technical Characteristics

- Working voltage: 300/500v (H05V-U)
- Working voltage: 450/750v (H07V-U)
- Test voltage: 2000V(H05V-U)/2500V (H07V-U)
- Flexing bending radius: 15 x Ø
- Static bending radius: 15 x Ø
- Flexing temperature: -5° C to +70° C
- Static temperature: -30° C to +80° C
- Short circuit temperature: +160° C
- Flame retardant: IEC 60332.1
- Insulation resistance: 10 MΩ x km



Bare copper conductor

PVC insulation

H07V2-U



Harmonized Code

Cable Parameter

AWG	No. of Cores x Nominal Cross Sectional Area # x mm²	Nominal Thickness of Insulation mm	Nominal Overall Diameter mm	Nominal Copper Weight kg/km	Nominal Weight kg/km
20	1 x 0.5	0.6	2.1	4.8	9
18	1 x 0.75	0.6	2.2	7.2	11
17	1 x 1	0.6	2.4	9.6	1
16	1 x 1.5	0.7	2.9	14.4	21
14	1 x 2.5	0.8	3.5	24.0	33
12	1 x 4	0.8	3.9	38.0	49
10	1 x 6	0.8	4.5	58.0	69
8	1 x 10	1.0	5.7	96.0	115