



## Type SHD-PCG Three-Conductor Round Portable Power Cable 2kV


### » Applications .....

These heavy duty cables are designed for use on longwall shearers, where three shielded power conductors, three unshielded control conductors, and a grounding conductor are required.

### » Standards .....

- ICEA S-75-381/NEMA WC 58
- ASTM B 172
- ASTM B 33
- CAN/CSA-C22.2 No.96

### » Construction .....

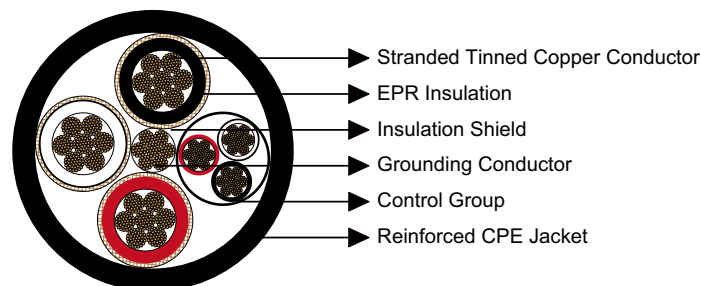

#### **Conductors:**

Stranded annealed tinned copper conductor.

#### **Insulation:**

Ethylene Propylene Rubber (EPR).

#### **Insulation Shield:**

Tinned copper/textile braid.

#### **Control Group (3 Conductor):**

Tinned copper conductor, EPR insulation and thermosetting jacket. Colour of insulation: Black, white and red.



# Caledonian Mining Cables

## Portable Power Cables

### Grounding Conductor:

Tinned copper conductor, located in the center of the cable.

### Jacket:

Reinforced extra-heavy-duty Chlorinated Polyethylene (CPE), black.

### » Options .....

- Other jacket materials such as CSP/PCP/NBR/PVC are available upon request.
- Two-layer jacket with reinforcing fibre between the two layers can be offered as an option.

### » Mechanical and Thermal Properties .....

Minimum Bending Radius: 6×OD

Maximum Conductor Operating Temperature: +90°C

### » Dimensions and Weight .....

Construction	No. of Strands	Grounding Conductor Size	Control Conductor Size	Nominal Insulation Thickness		Nominal Jacket Thickness		Nominal Overall Diameter		Nominal Weight		Ampacity
				inch	mm	inch	mm	inch	mm	lbs/kft	kg/km	
No. of cores×AWG/kcmil	-	AWG/kcmil	AWG/kcmil									A
3×1/0	259	3	8	0.08	2.0	0.205	5.2	2.05	52.1	3092	4602	211
3×2/0	329	2	8	0.08	2.0	0.220	5.6	2.25	57.1	3698	5503	243
3×3/0	413	1	8	0.08	2.0	0.220	5.6	2.32	58.9	4295	6392	279
3×4/0	532	1/0	8	0.08	2.0	0.250	6.3	2.62	66.5	5115	7612	321

Ampacity-Based on a conductor temperature of 90°C and an ambient air temperature of 40°C, per ICEA S-75-381.