



## Type W Two-Conductor Flat Portable Power Cable 2kV

### » Applications .....

These flat parallel cables are designed for use on DC mining equipment, such as D.C. shuttle cars, drills, cutting and loading machines.

### » Standards .....


ICEA S-75-381/NEMA WC 58

ASTM B 172

ASTM B 33

CAN/CSA C22.2 No. 96

### » Construction .....

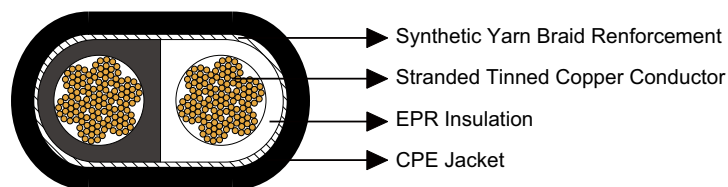

#### **Conductors:**

Stranded annealed tinned copper conductor.

#### **Insulation:**

Ethylene Propylene Rubber (EPR).

#### **Reinforcement:**

Synthetic yarn.

#### **Jacket:**

Heavy-duty/extra-heavy-duty Chlorinated Polyethylene (CPE), black. (Cables having a nominal outside diameter of more than 2.0 inches require extra-heavy-duty jackets.)

### » Options .....

- Other jacket materials such as CSP/PCP/NBR/PVC are available upon request.
- Two-layer jacket with reinforcing fibre between the two layers can be offered as an option.



# Caledonian Mining Cables

## Portable Power Cables

### » Mechanical and Thermal Properties .....

Minimum Bending Radius: 6×OD

Maximum Conductor Operating Temperature: +90°C

### » Dimensions and Weight .....

Construction	No. of Strands	Nominal Insulation Thickness		Nominal Jacket Thickness		Nominal Overall Diameter Height×Width		Nominal Weight		Ampacity
		inch	mm	inch	mm	inch	mm	lbs/kft	kg/km	
No. of cores×AWG/ kcmil	-									A
2×8	133	0.06	1.5	0.080	2.0	0.51×0.84	13.0×21.3	340	506	72
2×6	133	0.06	1.5	0.080	2.0	0.56×0.93	14.2×23.6	440	655	95
2×4	259	0.06	1.5	0.095	2.4	0.61×1.05	15.5×26.7	550	818	127
2×3	259	0.06	1.5	0.095	2.4	0.68×1.14	17.3×29.0	675	1005	145
2×2	259	0.06	1.5	0.095	2.4	0.73×1.24	18.5×31.5	810	1205	167
2×1	259	0.08	2.0	0.110	2.8	0.81×1.40	20.6×35.6	1020	1520	191
2×1/0	259	0.08	2.0	0.125	3.2	0.93×1.51	23.6×38.2	1265	1880	217
2×2/0	329	0.08	2.0	0.125	3.2	0.99×1.63	25.1×41.4	1515	2255	250
2×3/0	413	0.08	2.0	0.140	3.6	1.03×1.77	26.2×45.0	1810	2694	286
2×4/0	532	0.08	2.0	0.140	3.6	1.10×1.89	27.9×48.0	2175	3237	328

Ampacity-Based on a conductor temperature of 90°C and an ambient air temperature of 40°C, per ICEA S-75-381.