


FIREROL Medium Wall Multicore Overall Screened Cables 300/500 V or 0.6/1 kV EN 50264-3-2 (FRL-MW-05M-OS/FRL-MW-1M-OS)

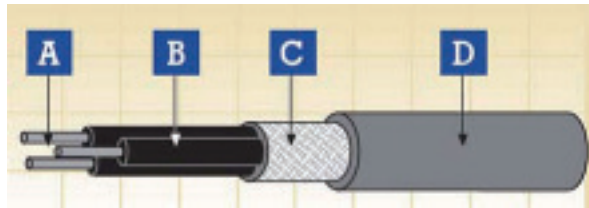

A. Conductor B. Insulation C. Screen D. Sheath

Application

- Used as power and control cable for protected installations inside and outside of rail and transport vehicles, where handling and installation cost are an important factor.
- Used in control, auxiliary and main circuit wiring such as cable harnesses, switchboards and control panels, driver desks etc.

Construction

Conductor

Flexible tinned annealed copper wires, stranded as per HD 383 (IEC 60228) class 5

Insulation

LSZH elastomeric compound as defined in EN 50264-1 (EI 106 to EI 110)

Overall Screen

Tinned annealed copper wires

Outer Sheath

LSZH elastomeric compound as defined in EN 50264-1 (EM 101 to EI 104)

Electrical & Mechanical Properties

Nominal Voltage	300/500 V or 0.6/1 kV
Max. Conductor Temperature	90 °C (fixed installation)
Min. Permissible Ambient Temperature	-25 °C / -40 °C (fixed installation)
Bending Radius	Fixed installation: 4 x Overall Diameter (D<12mm); 5 x Overall Diameter (D>12mm) Flexible installation: 8 x Overall Diameter (D<12mm); 10 x Overall Diameter (D>12mm)

Chemical & Environmental Properties

EN 60684-2	No fluorine
EN 50305; EN 60811-2-1	Resistance to mineral oil & fuel oil, acid & alkali
EN 50305	Resistance to ozone

Fire Performance for Rolling Stock Application

EN 50306-2	Hazard levels HL1, HL2/HL3, HL4
DIN 5510-2	Protection level 1/2/3/4
BS 6853	Interior use 1a, 1b, II; Exterior use 1a, 1b, II
NF F 16-101	F0

Fire Performance in General

EN 50265-2-1; IEC 60332-1-2; NF C 32-070 2.1 (C2)	Vertical flame propagation for a single insulated wire or cable
EN 50266-2-4 + EN 50305; IEC 60332-3-24; NF C 32-070 2.2 (C1); VDE 0472 Teil 804	Vertical flame spread of vertically mounted bunched wires or cables
EN 50268-2; IEC 61034-2; NF C 32-073 ; NF C 20-902; NF F 16 101; VDE 0472 Teil 816	Low Smoke Emission
EN 50267-2-1; IEC 60754-1; NF C 32-074; NF C 20-454; VDE 0472 Teil 815	Halogen Free
EN 50267-2-2/3; IEC 60754-2; NF C 32-074; NF C 20-453; VDE 0472 Teil 813	Low Corrosivity (Acidity & Conductivity)

EN 50264 Rolling Stock Cables

EN 50305; NF X 70-100; NF F 63 808; TM1-04; BS6853
NF F 63 808; BS6853; NF F 16 101

Low Toxicity
Smoke Index

FRL-MW-05M-OS 300/500 V

Nominal Cross-Sectional Area (a)	Conductor Diameter (b)	Min. Mean Thickness of Insulation	Core Dimensions		Min. Screen Wire Diameter	Min. Average Sheath Thickness	Overall Diameter		Weight	Max. Conductor Resistance 20 °C	Min. Insulation Resistance	
			Min.	Max.			Min.	Max.			EI 110 20 °C	EI 106/7/8/9 20 °C
n x mm ²	mm	mm	mm	mm	mm	mm	mm	kg/km	Ω/km	MΩ x km	MΩ x km	
2x1	1.25	0.4	2.0	2.4	0.16	0.6	6.0	7.1	70	20.0	15.0	7.5
4x1	1.25	0.4	2.0	2.4	0.16	0.7	7.0	8.2	110	20.0	15.0	7.5
7x1	1.25	0.4	2.0	2.4	0.16	0.7	8.2	9.6	150	20.0	15.0	7.5
9x1	1.25	0.4	2.0	2.4	0.21	0.8	10.2	11.9	220	20.0	15.0	7.5
12x1	1.25	0.4	2.0	2.4	0.21	0.8	10.9	12.7	260	20.0	15.0	7.5
19x1	1.25	0.4	2.0	2.4	0.26	1.0	13.2	15.4	400	20.0	15.0	7.5
24x1	1.25	0.4	2.0	2.4	0.26	1.0	15.2	17.8	500	20.0	15.0	7.5
32x1	1.25	0.4	2.0	2.4	0.26	1.0	16.6	19.4	610	20.0	15.0	7.5
37x1	1.25	0.4	2.0	2.4	0.26	1.0	17.2	20.1	670	20.0	15.0	7.5
40x1	1.25	0.4	2.0	2.4	0.26	1.2	18.2	21.3	740	20.0	15.0	7.5
4x1.5	1.5	0.5	2.4	2.9	0.16	0.7	8.0	9.4	140	13.7	14.0	7.0
7x1.5	1.5	0.5	2.4	2.9	0.21	0.7	9.6	11.3	220	13.7	14.0	7.0
9x1.5	1.5	0.5	2.4	2.9	0.21	1.0	12.1	14.2	290	13.7	14.0	7.0
12x1.5	1.5	0.5	2.4	2.9	0.21	1.0	13.0	15.2	360	13.7	14.0	7.0
19x1.5	1.5	0.5	2.4	2.9	0.26	1.0	15.3	17.9	540	13.7	14.0	7.0
24x1.5	1.5	0.5	2.4	2.9	0.26	1.2	18.1	21.2	700	13.7	14.0	7.0
32x1.5	1.5	0.5	2.4	2.9	0.26	1.2	19.8	23.2	860	13.7	14.0	7.0
37x1.5	1.5	0.5	2.4	2.9	0.26	1.2	20.5	24.0	960	13.7	14.0	7.0
4x2.5	1.95	0.5	2.9	3.4	0.21	0.7	9.2	10.8	200	8.21	13.0	6.5
7x2.5	1.95	0.5	2.9	3.4	0.21	0.8	11.1	13.0	310	8.21	13.0	6.5
9x2.5	1.95	0.5	2.9	3.4	0.26	1.0	13.9	16.3	440	8.21	13.0	6.5
12x2.5	1.95	0.5	2.9	3.4	0.26	1.0	15.0	17.5	520	8.21	13.0	6.5
19x2.5	1.95	0.5	2.9	3.4	0.26	1.2	17.8	20.8	770	8.21	13.0	6.5
24x2.5	1.95	0.5	2.9	3.4	0.26	1.2	20.6	24.1	970	8.21	13.0	6.5

(a)= One earth conductor (green/yellow) can be included upon request


(b)= For information, indicative only



FRL-MW-1M-OS 0.6/1 kV

Nominal Cross-Sectional Area (a)	Conductor Diameter (b)	Min. Mean Thickness of Insulation	Core Dimensions		Min. Screen Wire Diameter	Min. Average Sheath Thickness	Overall Diameter		Weight	Max. Conductor Resistance 20 °C	Min. Insulation Resistance	
			Min.	Max.			Min.	Max.			EI 110 20 °C	EI 106/7/8/9 20 °C
TWO CORES												
1.5	1.5	0.7	2.8	3.3	0.16	0.70	7.9	9.9	90	13.7	21.0	10.5
2.5	1.95	0.7	3.2	3.8	0.16	0.70	8.7	10.7	120	8.21	17.2	8.6
4	2.5	0.7	3.8	4.4	0.21	0.80	10.2	12.7	170	5.09	14.2	7.1
6	3.0	0.7	4.2	5.0	0.21	0.80	10.9	13.6	210	3.39	12.2	6.1
10	3.9	0.7	5.1	5.9	0.21	1.00	13.4	16.6	320	1.95	9.8	4.9
16	5.0	0.7	6.1	7.2	0.26	1.00	16.0	19.8	470	1.24	7.9	3.9
25	6.4	0.9	7.8	9.1	0.26	1.20	19.8	24.6	690	0.795	7.3	3.6
35	7.7	0.9	9.0	10.6	0.31	1.40	22.8	27.9	940	0.565	6.7	3.3
50	9.2	1.0	10.6	12.4	0.31	1.40	26.4	32.3	1260	0.393	6.3	3.1
THREE CORES												
1.5	1.5	0.7	2.8	3.3	0.16	0.70	8.4	10.4	120	13.7	21.0	10.5
2.5	1.95	0.7	3.2	3.8	0.16	0.70	9.2	11.4	160	8.21	17.2	8.6
4	2.5	0.7	3.8	4.4	0.21	0.80	10.8	13.3	230	5.09	14.2	7.1
6	3.0	0.7	4.2	5.0	0.21	0.80	11.6	14.3	300	3.39	12.2	6.1
10	3.9	0.7	5.1	5.9	0.26	1.00	14.4	18.0	500	1.95	9.8	4.9
16	5.0	0.7	6.1	7.2	0.26	1.20	17.4	21.3	680	1.24	7.9	3.9
25	6.4	0.9	7.8	9.1	0.26	1.20	21.3	26.1	970	0.795	7.3	3.6
35	7.7	0.9	9.0	10.6	0.31	1.40	24.5	29.8	1330	0.565	6.7	3.3
50	9.2	1.0	10.6	12.4	0.31	1.60	28.3	34.6	1820	0.393	6.3	3.1
FOUR CORES												
1.5	1.5	0.7	2.8	3.3	0.16	0.70	9.1	11.3	150	13.7	21.0	10.5
2.5	1.95	0.7	3.2	3.8	0.21	0.80	10.4	12.9	220	8.21	17.2	8.6
4	2.5	0.7	3.8	4.4	0.21	0.80	11.8	14.5	290	5.09	14.2	7.1
6	3.0	0.7	4.2	5.0	0.21	1.00	13.1	16.1	400	3.39	12.2	6.1
10	3.9	0.7	5.1	5.9	0.26	1.00	15.9	19.5	640	1.95	9.8	4.9
16	5.0	0.7	6.1	7.2	0.26	1.20	19.3	23.6	860	1.24	7.9	3.9
25	6.4	0.9	7.8	9.1	0.31	1.40	24.0	29.3	1290	0.795	7.3	3.6
3x35+25	7.7/6.4	0.9/0.9	9.0/7.8	10.6/9.1	0.31	1.4	26.9	32.9	1910	0.565/0.795	6.7	3.3
3x50+25	9.2/6.4	1.0/0.9	10.6/7.8	12.4/9.1	0.31	1.6	31.5	38.2	2560	0.393/0.795	6.3	3.1


(a)= For information, indicative only




Corona Resistant




Highly Flexible



UV Resistant



Ozone Resistant



Abrasion Retardant



Cold Resistant



Resistance To Soldering Heat



Acid & Alkaline Resistant



IRM 903
Fuel Oil Resistant



IRM 902
Mineral Oil Resistant



Fire Retardant
NF C32-070-2.2(C1)
IEC60332-3-24/EN50266-2-4



Flame Retardant
NF C32-070-2.1(C2)
IEC60332-1-2/EN50265-2-1




Low Toxicity
EN 50305: NF X70-100/NF
F63 808/TM1-04/BS 6853



Low Corrosivity
IEC60754-2/EN50267-2-2/3
NF C32-074/NF C20-453



Low Smoke Emission
IEC 61034-2 / EN 50268-2
NF C32-073/NF C 20-902



Zero Halogen
IEC 60754-1/EN 50267-2-1
NF C20-454