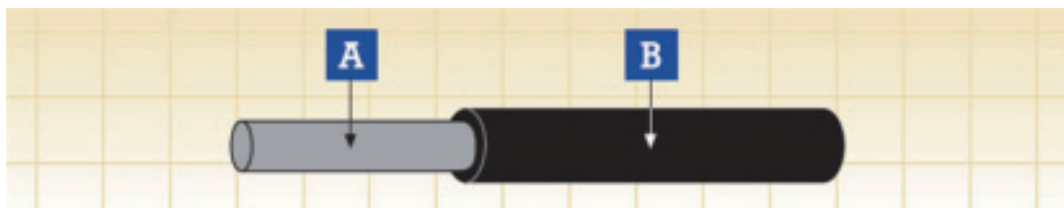


## FIREROL Standard Wall Single Core Unsheathed Cables

500 V, 1000 V, 1500 V, 3000 V

NF F 63-826 (FRF-SW-05SU/FRF-SW-1SU,FRF-SW-1.5SU/FRF-SW-3SU)



A. Conductor B. Insulation

### Application

These cables are used as power and control cable for protected installations inside and outside of rail and transport vehicles, where handling and installation cost are an important factor, suitable for use in control, auxiliary and main circuit wiring such as cable harnesses, switchboards and control panels, driver desks etc.

### Construction

#### Conductor

Stranded tinned copper wires to IEC 60228 Class 5

#### Insulation

Special halogen free compound

### Electrical & Mechanical Properties

Nominal Voltage

500 V, 1000 V, 1500 V, 3000 V

Max. Conductor Temperature

90 °C/105 °C

Temperature Range

-25 °C~90 °C

Bending Radius

4 × Overall Diameter

### Standards

NF F 63-826

NF F 16-101

BS 6853

### Fire Performance in General

EN 50265-2-1; IEC 60332-1-2; NF C 32-070 2.1 (C2)

EN 50266-2-4 + EN 50305; IEC 60332-3-24;

NF C 32-070 2.2 (C1); VDE 0472 Teil 804

EN 50268-2; IEC 61034-2; NF C 32-073 ;

NF C 20-902; NF F 16 101; VDE 0472 Teil 816

EN 50267-2-1; IEC 60754-1; NF C 32-074;

NF C 20-454; VDE 0472 Teil 815

EN 50267-2-2/3; IEC 60754-2; NF C 32-074;

NF C 20-453; VDE 0472 Teil 813

EN 50305; NF X 70-100; NF F 63 808; TM1-04; BS6853

NF F 63 808; BS6853; NF F 16 101

Vertical flame propagation for a single insulated wire or cable

Vertical flame spread of vertically mounted bunched wires or cables

Low Smoke Emission

Halogen Free

Low Corrosivity (Acidity & Conductivity)

Low Toxicity

Smoke Index

**FRF-SW-05SU 500 V**

Nominal Cross-Sectional Area	Number & Nominal Diameter of Strands	Nominal Insulation Thickness	Overall Diameter		Weight
			Min.	Max.	
mm <sup>2</sup>	No/mm	mm	mm	mm	kg/km
1.0	32/0.20	1.3	3.8	4.5	26
1.5	30/0.25	1.3	4.1	4.8	33
2.5	50/0.25	1.3	4.5	5.2	43
4.0	56/0.30	1.3	5.0	5.8	59
6.0	84/0.30	1.4	5.7	6.5	82
10.0	80/0.40	1.5	6.9	8.1	135
16.0	126/0.40	1.5	8.2	9.2	210

**FRF-SW-1SU 1000 V**

Nominal Cross-Sectional Area	Number & Nominal Diameter of Strands	Nominal Insulation Thickness	Overall Diameter		Weight
			Min.	Max.	
mm <sup>2</sup>	No/mm	mm	mm	mm	kg/km
1.5	30/0.25	1.5	4.4	5.2	42
2.5	50/0.25	1.5	4.8	5.6	55
4.0	56/0.30	1.5	5.4	6.2	72
6.0	84/0.30	1.6	6.1	6.9	96
10.0	80/0.40	1.6	7.0	8.3	154
16.0	126/0.40	1.6	8.3	9.4	218
25.0	196/0.40	1.7	9.8	11.0	316
35.0	276/0.40	1.8	11.2	12.5	440
50.0	396/0.40	1.9	13.0	14.3	580
70.0	360/0.50	2.0	14.7	16.3	830
95.0	475/0.50	2.0	16.6	18.4	1040
120.0	608/0.50	2.1	18.6	20.5	1310

**FRF-SW-1.5SU 1500 V**

Nominal Cross-Sectional Area	Number & Nominal Diameter of Strands	Nominal Insulation Thickness	Overall Diameter		Weight
			Min.	Max.	
mm <sup>2</sup>	No/mm	mm	mm	mm	kg/km
1.5	30/0.25	2.3	6.0	6.8	59
2.5	50/0.25	2.3	6.4	7.2	73
4.0	56/0.30	2.3	7.0	7.8	91
6.0	84/0.30	2.3	7.5	8.3	120
10.0	80/0.40	2.3	8.4	9.7	160
16.0	126/0.40	2.3	9.7	10.8	235
25.0	196/0.40	2.3	11.0	12.2	330
35.0	276/0.40	2.4	12.4	13.7	480
50.0	396/0.40	2.5	14.2	15.5	610
70.0	360/0.50	2.7	16.1	17.7	860
95.0	475/0.50	2.7	18.0	19.8	1070
120.0	608/0.50	2.8	20.0	21.9	1340
150.0	756/0.50	2.8	21.8	23.8	1620
185.0	925/0.50	2.9	23.7	25.9	1940
240.0	1221/0.50	3.1	26.6	29.1	2550
300.0	1525/0.50	3.45	29.4	31.9	2950

















# NF F 63-826 Rolling Stock Cables

FRF-SW-3SU 3000 V

Nominal Cross-Sectional Area	Number & Nominal Diameter of Strands	Nominal Insulation Thickness	Overall Diameter		Weight
			Min.	Max.	
mm <sup>2</sup>	No/mm	mm	mm	mm	kg/km
2.5	50/0.25	3.1	8.0	8.8	94
4.0	56/0.30	3.1	8.5	9.5	124
6.0	84/0.30	3.1	8.8	9.9	135
10.0	80/0.40	3.1	10.0	11.3	200
16.0	126/0.40	3.1	11.2	12.4	265
25.0	196/0.40	3.1	12.5	13.8	375
35.0	276/0.40	3.2	13.9	15.3	493
50.0	396/0.40	3.3	15.7	17.2	680
70.0	360/0.50	3.4	17.5	19.1	930
95.0	475/0.50	3.5	19.5	21.4	1066
120.0	608/0.50	3.6	21.6	23.5	1530
150.0	756/0.50	3.6	23.3	25.5	1740
185.0	925/0.50	3.7	25.2	27.6	2100
240.0	1221/0.50	3.9	28.1	31.7	2460
300.0	1525/0.50	4.45	31.4	35.0	3050

NF F 63-826 Rolling Stock Cables



 Impact Resistant	 Highly Flexible	 UV Resistant	 Ozone Resistant	 Abrasion Retardant	 Cold Resistant	 Resistance To Soldering Heat	 Acid & Alkaline Resistant
 IRM 903 Fuel Oil Resistant	 IRM 902 Mineral Oil Resistant	 Fire Retardant NF C32-070-2.2(C1) IEC60332-3-24/EN50266-2-4	 Flame Retardant NF C32-070-2.1(C2) IEC60332-1-2/EN50265-2-1	 Low Toxicity EN 50305; NF X70-100/NF F63 808/TM1-04/BS 6853	 Low Corrosivity IEC60754-2/EN50267-2-2/3 NF C32-074/NF C20-453	 Low Smoke Emission IEC 61034-2 / EN 50268-2 NF C32-073/NF C 20-902	 Zero IEC 60754-1/EN 50267-2-1 NF C20-454