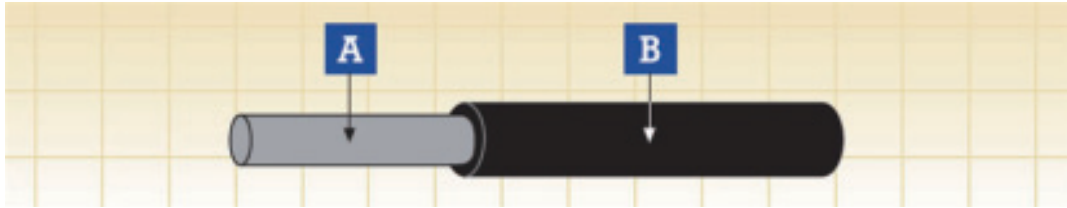


FIREROL Extra-Flexible Standard Wall Single Core Unsheathed Cable 1500 V NF F 63-826 (FRF-SW-1.5SU-EF)



A. Conductor B. Insulation

Application

These cables are used as power and control cable for protected installations inside and outside of rail and transport vehicles, where handling and installation cost are an important factor, suitable for use in control, auxiliary and main circuit wiring such as cable harnesses, switchboards and control panels, driver desks etc.

Construction

Conductor

Stranded tinned copper wires to IEC 60228 Class 6

Insulation

Special halogen free compound

Electrical & Mechanical Properties

Nominal Voltage	1500 V
Max. Conductor Temperature	90 °C/105 °C
Temperature Range	-25 °C~+90 °C
Bending Radius	3 × Overall Diameter

Standards

NF F 63-826
NF F 16-101
BS 6853

Fire Performance in General

















EN 50265-2-1; IEC 60332-1-2; NF C 32-070 2.1 (C2)	Vertical flame propagation for a single insulated wire or cable
EN 50266-2-4 + EN 50305; IEC 60332-3-24; NF C 32-070 2.2 (C1); VDE 0472 Teil 804	Vertical flame spread of vertically mounted bunched wires or cables
EN 50268-2; IEC 61034-2; NF C 32-073 ; NF C 20-902; NF F 16 101; VDE 0472 Teil 816	Low Smoke Emission
EN 50267-2-1; IEC 60754-1; NF C 32-074; NF C 20-454; VDE 0472 Teil 815	Halogen Free
EN 50267-2-2/3; IEC 60754-2; NF C 32-074; NF C 20-453; VDE 0472 Teil 813	Low Corrosivity (Acidity & Conductivity)
EN 50305; NF X 70-100; NF F 63 808; TM1-04; BS6853 NF F 63 808; BS6853; NF F 16 101	Low Toxicity Smoke Index

NF F 63-826 Rolling Stock Cables

FRF-SW-1.5SU-EF 1500 V

Nominal Cross-Sectional Area	Number & Nominal Diameter of Strands	Nominal Insulation Thickness	Overall Diameter		Weight
			Min.	Max.	
mm ²	No/mm	mm	mm	mm	kg/km
10.0	320/0.20	2.3	8.4	9.5	187
16.0	512/0.20	2.3	9.7	10.8	266
25.0	800/0.20	2.3	11.0	12.2	354
35.0	1120/0.20	2.4	12.4	13.7	440
50.0	705/0.30	2.5	14.2	15.5	613
70.0	990/0.30	2.7	16.1	17.7	875
95.0	1340/0.30	2.7	18.0	19.8	1045
120.0	1690/0.30	2.8	20.0	21.9	1350
150.0	2123/0.30	2.8	21.8	23.8	1650
185.0	1470/0.40	2.9	23.7	25.9	2130



 Impact Resistant	 Highly Flexible	 UV Resistant	 Ozone Resistant	 Abrasion Retardant	 Cold Resistant	 Resistance To Soldering Heat	 Acid & Alkaline Resistant
 IRM 903 Fuel Oil Resistant	 IRM 902 Mineral Oil Resistant	 Fire Retardant NF C32-070-2.2(C1) IEC60332-3-24/EN50266-2-4	 Flame Retardant NF C32-070-2.1(C2) IEC60332-1-2/EN50265-2-1	 Low Toxicity EN 50305; NF X70-100/NF F63 808/TM1-04/BS 6853	 Low Corrosivity IEC60754-2/EN50267-2-2/3 NF C32-074/NF C20-453	 Low Smoke Emission IEC 61034-2 / EN 50268-2 NF C32-073/NF C 20-902	 Zero IEC 60754-1/EN 50267-2-1 NF C20-454