





Twisted Single Pair FEP Insulated

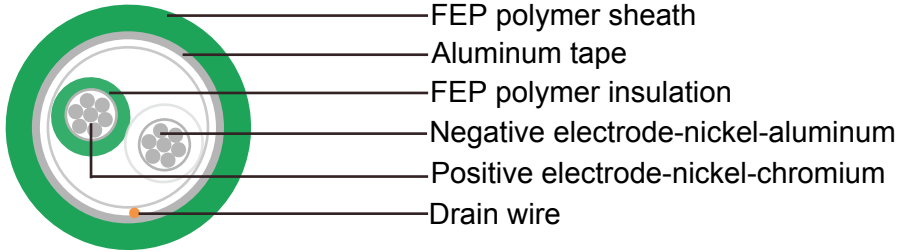

KX FEP insulated

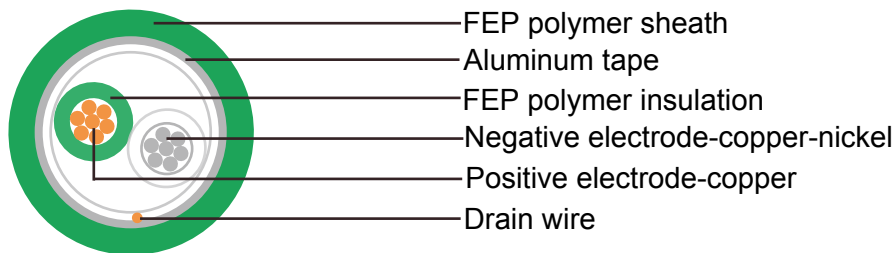

KCB FEP insulated

Application

These cables are used with thermocouples for temperature measurements.

Specification

Conductor: Solid or stranded. Material is according to thermocouple type.

Insulation: FEP polymer

Screen: Aluminum tape

Drain wire: Tinned copper

Outer sheath: FEP polymer

Construction: Round

Color code: According to IEC 60584-3

K Type

AWG(mm)	Insulation Material	Screen Material	Sheath Material	Max. Temp. (°C)	Nominal O.D. (mm)	Weight (kg/km)
24 (0.51)	FEP Polymer	Aluminum tape	FEP Polymer	200	2.7	13.4
24 (7/0.2)	FEP Polymer	Aluminum tape	FEP Polymer	200	2.9	13.8
20 (0.81)	FEP Polymer	Aluminum tape	FEP Polymer	200	3.7	30.0
20 (7/0.32)	FEP Polymer	Aluminum tape	FEP Polymer	200	3.8	30.3