





## THERMOCOUPLE CABLES

### Twisted Single Pair PFA Insulated

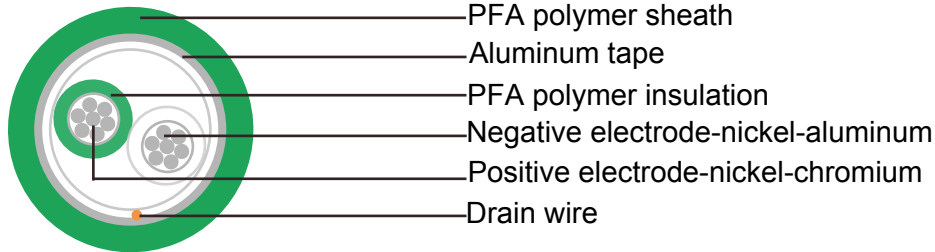

KX PFA insulated

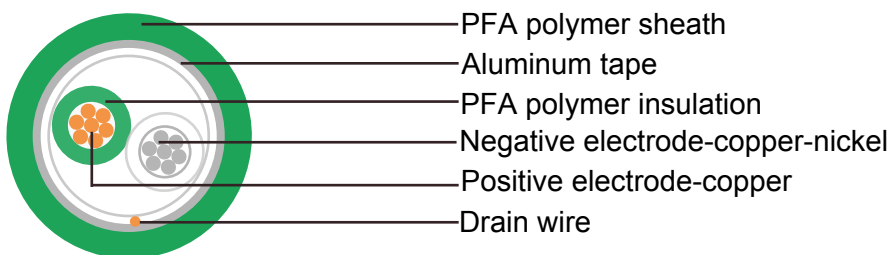

KCB FPA insulated

#### Application

These cables are used with thermocouples for temperature measurements.

#### Specification

Conductor: Solid or stranded. Material is according to thermocouple type.

Insulation: PFA polymer

Screen: Aluminum tape

Drain wire: Tinned copper

Outer sheath: PFA polymer

Construction: Round

Color code: According to IEC 60584-3

#### K Type

AWG(mm)	Insulation Material	Screen Material	Sheath Material	Max. Temp. (°C)	Nominal O.D. (mm)	Weight (kg/km)
24 (0.51)	PFA Polymer	Aluminum tape	PFA Polymer	260	2.7	13.4
24 (7/0.2)	PFA Polymer	Aluminum tape	PFA Polymer	260	2.9	13.8
20 (0.81)	PFA Polymer	Aluminum tape	PFA Polymer	260	3.7	30.0
20 (7/0.32)	PFA Polymer	Aluminum tape	PFA Polymer	260	3.8	30.3