



中国认可
国际互认
检测
TESTING
CNAS L6069



Test Report

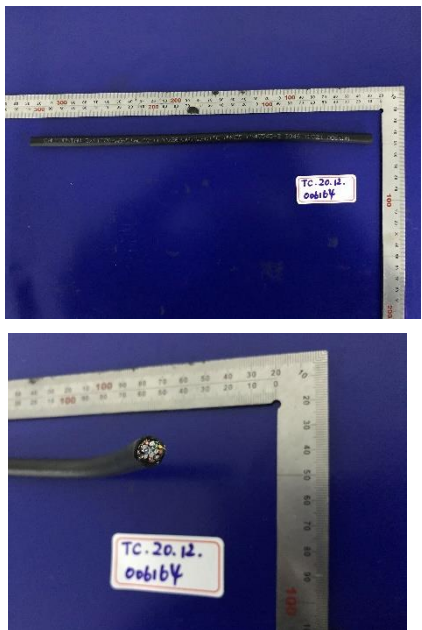
Report No. TC.20.12.006164

Date of Issue 12/18/2020

Applicant: Caledonian Cables Limited

Applicant address: 1/F., CMA Building, 64-66 Connaught Road Central, Hong kong

Description of the test subject:

Sample	Description	Photo
001	Sample Description: Rolling stock cables Style No.: HDMI CABLE 5×(1P26AWG+D+AL/MY) +4C×26AWG+AL+D+TC	

Receipt Date of Sample: 12/07/2020

Date of Testing: From 12/07/2020 to 12/17/2020

Sample submitted: The sample(s) was (were) submitted by applicant and identified.

Note: (1) General Terms & Conditions as mentioned overleaf. (2) The results relate only to the items tested. (3) The test report shall not be reproduced except in full without the written approval of the company. (4) Samples are tested as received.

Laboratory:
TÜV SÜD SW Rail Transportation
Technology (Jiangsu) Co., Ltd.



Phone: +86/ (0) 519- 8123-9872
Fax: +86/ (0) 519- 8123-9872 ext.123
E-mail: Haixin.Zhao @tuvsud.com
www.tuvsud.com

No. 164, Wuyi Road ,Lucheng Street, Wujin
District, Changzhou city, Jiangsu Province,
213015 P.R. China



中国认可
国际互认
检测
TESTING
CNAS L6069



Test Report

Report No. TC.20.12.006164

Date of Issue 12/18/2020

Conclusion:

Test Items			Result					
			R15			R16		
No.	Items	Test method	HL1	HL2	HL3	HL1	HL2	HL3
1	Single wire or cable burn testing	EN 45545-2:2013+A1:2015 EN 60332-1-2:2004+A1:2015	Pass	Pass	Pass	Pass	Pass	Pass
2	Vertically-mounted bunched wires or cables burn testing	EN 45545-2:2013+A1:2015 EN 50305:2002	Pass	Pass	Pass	Pass	Pass	Pass
3	Smoke density testing	EN 45545-2:2013+A1:2015 EN 61034-2:2005	Pass	Pass	Pass	*	Pass	Pass
4	Smoke toxicity testing	EN 45545-2:2013+A1:2015 EN 50305:2002	Pass	Pass	Pass	Pass	Pass	Pass

Remark: *=Standards are not required.

Test Results

EN 45545-2:2013+A1:2015 Railway applications-Fire protection on railway vehiclesPart2: Requirements for fire behaviour of materials and components

1. EN 60332-1-2:2004+A1:2015 Tests on electric and optical fiber cables under fire conditions —Part 1-2: Test for vertical flame propagation for a single insulated wire or cable —Procedure for 1 kW pre-mixed flame

1.1 Sample details

Diameter	9.0mm
Specimen size	600mm
Time for flame application	60s

Precondition	Temperature (°C)	Humidity (%)	Duration(h)
	23±5	50±20	16

1.2 Test results

Measurements/ observation	1 st Test
The distance between the lower edge of the top support and the onset of charring (mm)	395
The distance between the lower edge of the top support and the charring downwards (mm)	480

Note: (1) General Terms & Conditions as mentioned overleaf. (2) The results relate only to the items tested. (3) The test report shall not be reproduced except in full without the written approval of the company. (4) Samples are tested as received.

Laboratory:
TUV SUD SW Rail Transportation
Technology (Jiangsu) Co., Ltd.

Phone: +86/ (0) 519- 8123-9872
Fax: +86/ (0) 519- 8123-9872 ext.123
E-mail: Haixin.Zhao@tuvsud.com
www.tuvsud.com

No. 164, Wuyi Road ,Lucheng Street, Wujin
District, Changzhou city, Jiangsu Province,
213015 P.R. China



中国认可
国际互认
检测
TESTING
CNAS L6069



Test Report

Report No. TC.20.12.006164

Date of Issue 12/18/2020

Note: If a failure is recorded, two more tests shall be carried out. If both tests result in passes, the single insulated conductor or cable shall be deemed to have passed the test.

2. EN 50305:2002 Railway applications —Railway rolling stock cables having special fire performance — Test methods

2.1 Sample details

Specimen size	3.5m
Cable diameter	9.0mm
Conductor diameter	7/0.16mm×14
Number of bundles	8
Number of strands in the bundle	1
The method of mounting	Touching

Precondition	Temperature (°C)	Humidity (%)	Duration(h)
	20±10	50±20	16

2.2 Test results

Measurements/ observation	Result
The extent of damage	0.60m

3. EN 61034-2:2005 Measurement of smoke density of cables burning under defined conditions Part 2: Test procedure and requirements

3.1 Sample details

Diameter	9.0mm
Number of bundles	5
Number of strands in the bundle	1

Pre-conditioning	Indoor		Duration
	Temp: 23±2°C	Humidity: 50±5%	16 h
Ignition Source	Fire source 1		

Note: (1) General Terms & Conditions as mentioned overleaf. (2) The results relate only to the items tested. (3) The test report shall not be reproduced except in full without the written approval of the company. (4) Samples are tested as received.

Laboratory:
TUV SUD SW Rail Transportation
Technology (Jiangsu) Co., Ltd.

Phone: +86/ (0) 519- 8123-9872
Fax: +86/ (0) 519- 8123-9872 ext.123
E-mail: Haixin.Zhao @tuvsud.com
www.tuvsud.com

No. 164, Wuyi Road ,Lucheng Street, Wujin
District, Changzhou city, Jiangsu Province,
213015 P.R. China





中国认可
国际互认
检测
TESTING
CNAS L6069



Test Report

Report No. TC.20.12.006164

Date of Issue 12/18/2020

3.2 Test Result

The minimum light transmittance within 40 minutes; (%)	93.58
--	-------

4. EN 50305:2002 Railway applications — Railway rolling stock cables having special fire performance — Test methods

4.1 Sample details

Weight	Sheath: S1: 1.0013 g; S2: 1.0042 g; S3: 1.0009 g Insulation: S1: 1.0029 g; S2: 1.0034 g; S3: 1.0009 g		
Conditioning	Temperature (°C)	Humidity (%)	Duration (h)
	23±2	50±5	At least 48

4.2 Test results

Sheath	MDL	1	2	3	Average
Carbon Monoxide (CO)	5	20.6	22.9	21.5	21.7
Carbon Dioxide (CO ₂)	40	367.2	324.0	273.6	321.6
Sulphur Dioxide (SO ₂)	0.1	ND	ND	ND	ND
Nitrogen Dioxide (NO ₂)	0.5	ND	ND	ND	ND
Hydrogen Cyanide (HCN)	0.3	0.3	0.3	0.3	0.3

Sheath	CCz; mg/m ³	Mz; mg	$\frac{Mz}{CCz}$
Carbon Monoxide (CO)	1750	21.7	0.012
Carbon Dioxide (CO ₂)	90000	321.6	0.004
Sulphur Dioxide (SO ₂)	260	0	0
Nitrogen Dioxide (NO ₂)	90	0	0
Hydrogen Cyanide (HCN)	55	0.3	0.3
ITC			2.137

Note: (1) General Terms & Conditions as mentioned overleaf. (2) The results relate only to the items tested. (3) The test report shall not be reproduced except in full without the written approval of the company. (4) Samples are tested as received.

Laboratory:
TUV SUD Rail Transportation
Technology (Jiangsu) Co., Ltd.

Phone: +86/ (0) 519- 8123-9872
Fax: +86/ (0) 519- 8123-9872 ext.123
E-mail: Haixin.Zhao@tuvsud.com
www.tuvsud.com

No. 164, Wuyi Road, Lucheng Street, Wujin
District, Changzhou city, Jiangsu Province,
213015 P.R. China



中国认可
国际互认
检测
TESTING
CNAS L6069



Test Report

Report No. TC.20.12.006164

Date of Issue 12/18/2020

Insulation	MDL	1	2	3	Average
Carbon Monoxide (CO)	5	22.0	22.9	23.4	22.7
Carbon Dioxide (CO ₂)	40	396.0	381.6	374.4	384.0
Sulphur Dioxide (SO ₂)	0.1	ND	ND	ND	ND
Nitrogen Dioxide (NO ₂)	0.5	ND	ND	ND	ND
Hydrogen Cyanide (HCN)	0.3	0.3	0.4	0.3	0.3

Insulation	CCz; mg/m ³	Mz; mg	$\frac{Mz}{CCz}$
Carbon Monoxide (CO)	1750	22.7	0.013
Carbon Dioxide (CO ₂)	90000	384.0	0.004
Sulphur Dioxide (SO ₂)	260	0	0
Nitrogen Dioxide (NO ₂)	90	0	0
Hydrogen Cyanide (HCN)	55	0.3	0.3
ITC			2.327

Remark: Where ND indicates Non-detected.
Where MDL indicates Method Detection Limit.

The toxicity index (ITC) shall be calculated using the following formula:

$$ITC = \frac{100}{m} \sum \frac{Mz}{CCz}$$

Where,

M = weight of the sample, g;

Mz = weight of gas Z produced by the sample combustion, mg;

CCz = critical concentration for a 30 min exposure for gas z, mg/m³.

The determined Value: Sheath: ITC= 2.137 .
Insulation: ITC= 2.327 .

Note: (1) General Terms & Conditions as mentioned overleaf. (2) The results relate only to the items tested. (3) The test report shall not be reproduced except in full without the written approval of the company. (4) Samples are tested as received.

Laboratory:
TUV SUD SW Rail Transportation
Technology (Jiangsu) Co., Ltd.



Phone: +86/ (0) 519- 8123-9872
Fax: +86/ (0) 519- 8123-9872 ext.123
E-mail: Haixin.Zhao @tuvsud.com
www.tuvsud.com

No. 164, Wuyi Road ,Lucheng Street, Wujin
District, Changzhou city, Jiangsu Province,
213015 P.R. China



中国认可
国际互认
检测
TESTING
CNAS L6069



Test Report

Report No. **TC.20.12.006164**

Date of Issue **12/18/2020**

Requirement (EN 45545-2:2013+A1:2015):

	Items	Test method	Parameter	HL1	HL2	HL3
R15 cables for interior	single wire or cable burn testing	EN 45545-2:2013+A1:2015 EN 60332-1- 2:2004+A1:2015	Unburned length, mm (Min.)	Burned part ≤540 and unburned part >50	Burned part ≤540 and unburned part >50	Burned part ≤540 and unburned part >50
	vertically- mounted bunched wires or cables burn testing	EN 45545-2:2013+A1:2015 EN 60332-3-24:2009 (d ≥12mm)	Burned length, m (Max.)	2.5	2.5	2.5
		EN 50305:2002 (6mm <d <12mm)		2.5	2.5	2.5
		EN 50305:2002 (d ≤ 6 mm)		1.5	1.5	1.5
	Smoke density testing	EN 45545-2:2013+A1:2015 EN 61034-2:2005	Transmission % (Min.)	25	50	70
	Smoke toxicity testing	EN 45545-2:2013+A1:2015 EN 50305:2002	ITC (Max.)	10	10	6

	Items	Test method	Parameter	HL1	HL2	HL3
R16 cables for exterior	single wire or cable burn testing	EN 45545-2:2013+A1:2015 EN 60332-1- 2:2004+A1:2015	Unburned length, mm (Min.)	Burned part ≤540 and unburned part >50	Burned part ≤540 and unburned part >50	Burned part ≤540 and unburned part >50
	vertically- mounted bunched wires or cables burn testing	EN 45545-2:2013+A1:2015 EN 60332-3-24:2009 (d ≥12mm)	Burned length, m (Max.)	2.5	2.5	2.5
		EN 50305:2002 (6mm <d <12mm)		2.5	2.5	2.5
		EN 50305:2002 (d ≤ 6 mm)		1.5	1.5	1.5
	Smoke density testing	EN 45545-2:2013+A1:2015 EN 61034-2:2005	Transmission % (Min.)	-	25	50
	Smoke toxicity testing	EN 45545-2:2013+A1:2015 EN 50305:2002	ITC (Max.)	10	10	6

Note: (1) General Terms & Conditions as mentioned overleaf. (2) The results relate only to the items tested. (3) The test report shall not be reproduced except in full without the written approval of the company. (4) Samples are tested as received.

Laboratory:
TÜV SÜD Rail Transportation
Technology (Jiangsu) Co., Ltd.

检验检测专用章
Inspection/Testing Stamp

Phone: +86/ (0) 519- 8123-9872
Fax: +86/ (0) 519- 8123-9872 ext.123
E-mail: Haixin.Zhao@tuvsud.com
www.tuvsud.com

No. 164, Wuyi Road, Lucheng Street, Wujin
District, Changzhou city, Jiangsu Province,
213015 P.R. China



中国认可
国际互认
检测
TESTING
CNAS L6069



Test Report

Report No. TC.20.12.006164

Date of Issue 12/18/2020

Comprehensive:

No.	Items	Parameter	Record	R15			R16		
				HL1	HL2	HL3	HL1	HL2	HL3
1	single wire or cable burn testing	Unburned length, mm	395	Pass	Pass	Pass	Pass	Pass	Pass
2	vertically-mounted bunched wires or cables burn testing	Burned length, m	0.60	Pass	Pass	Pass	Pass	Pass	Pass
3	Smoke density testing	Transmission %	93.58	Pass	Pass	Pass	*	Pass	Pass
4	Smoke toxicity testing	ITC	Sheath:2.137	Pass	Pass	Pass	Pass	Pass	Pass
			Insulation:2.327						

Statement: The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential smoke and toxicity hazard of the product in use. Test results are just for internal reference.

TÜV SÜD SW Rail Transportation Technology (Jiangsu) Co., Ltd.

Drafted by:

wayne

Wayne Wang

Approved by:

Shen hui

Shen hui

-End of Report-

Note: (1) General Terms & Conditions as mentioned overleaf. (2) The results relate only to the items tested. (3) The test report shall not be reproduced except in full without the written approval of the company. (4) Samples are tested as received.

Laboratory:
TÜV SÜD SW Rail Transportation
Technology (Jiangsu) Co., Ltd.

Phone: +86/ (0) 519- 8123-9872
Fax: +86/ (0) 519- 8123-9872 ext.123
E-mail: Haixin.Zhao@tuvsud.com
www.tuvsud.com

No. 164, Wuyi Road ,Lucheng Street, Wujin
District, Changzhou city, Jiangsu Province,
213015 P.R. China

Page 7 of 7

