




### H03VV-F/ H03VVH2-F

#### Application and Description

These cable types are especially suited for use on small appliances with low mechanical stress and for connection for light household appliances, e.g. kitchen utensils, desk lamps, floor lamps, vacuum cleaners, office machines, radios, etc. As far as these cables are admitted to the relevant specifications of the equipment, They are not permitted for use with cooking or heating apparatus. Cables with cross section 0.75 mm<sup>2</sup> are not suitable for outdoor use or use of industrial or farmer machineries. Max operating voltage in single or three phase system is U<sub>o</sub>/U 330/330 volts. In a direct current system max operating voltage is U<sub>o</sub>/U 495/495 volts.

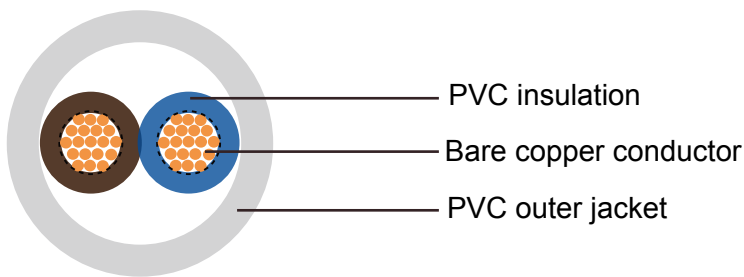


H03VV-F




H03VV-F

#### Standard and Approval

NF C 32-201-5, CE low voltage directive 73/23/EEC & 93/68/EEC.ROHS compliant

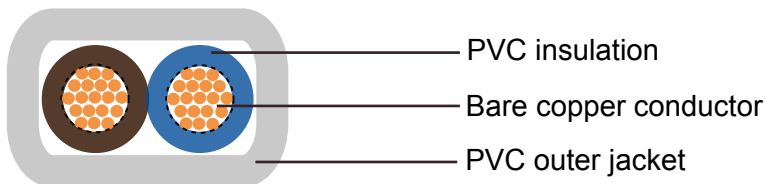

H03VVH2-F

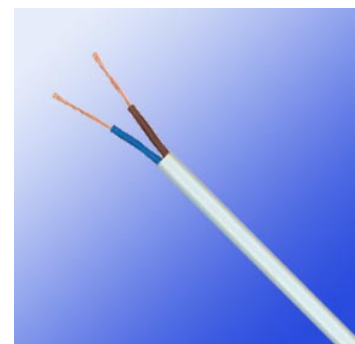

H03VVH2-F



## French Standard

### Cable Construction

- Bare copper fine wire conductor
- Stranded to DIN VDE 0295 cl. 5, BS 6360 cl. 5, IEC 60228 cl. 5 and HD 383
- PVC core insulation T12 to VDE-0281 Part 1
- Color coded to VDE-0293-308
- Green-yellow grounding (3 conductors and above)
- PVC outer jacket TM2

### Technical Characteristics

- Working voltage: 300/300 volts
- Test voltage: 2000 volts
- Flexing bending radius: 7.5 x Ø
- Static bending radius: 4 x Ø
- Flexing temperature: -5° C to +70° C
- Static temperature: -40° C to +70° C
- Short circuit temperature: +160° C
- Flame retardant: NF C 32-070
- Insulation resistance: 20 MΩ x km

### Cable Parameter

AWG	No. of Cores x Nominal Cross Sectional Area # x mm <sup>2</sup>	Nominal Thickness of Insulation mm	Nominal Thickness of Sheath mm	Nominal Overall Diameter mm	Nominal Copper Weight kg/km	Nominal Weight kg/km
<b>H03VV-F</b>						
20(16/32)	2 x 0.50	0.5	0.6	5	9.6	38
20(16/32)	3 x 0.50	0.5	0.6	5.4	14.4	45
20(16/32)	4 x 0.50	0.5	0.6	5.8	19.2	55
18(24/32)	2 x 0.75	0.5	0.6	5.5	14.4	46
18(24/32)	3 x 0.75	0.5	0.6	6	21.6	59
18(24/32)	4 x 0.75	0.5	0.6	6.5	28.8	72
18(24/32)	5 x 0.75	0.5	0.6	7.1	36.0	87
<b>H03VVH2-F</b>						
20(16/32)	2 x 0.50	0.5	0.6	3.2 x 5.2	9.7	32
18(24/32)	2 x 0.75	0.5	0.6	3.4 x 5.6	14.4	35