



H05RR-F

Application and Description

These cables are flexible rubber insulated; rubber jacketed harmonized cord, recommended for use in equipment, which is subject to light and medium stresses in both dry and damp environments. For use with electronics and electrical equipment such as appliances, small hand tools and office equipment They can be found in flat irons, soldering irons, kitchen aids, toasters, stoves and in connections with light commercial electric tools. Also suitable for fixed installation in furniture, decorative coverings, wall partitions and pre-fabricated building parts. Max operating voltage in single or three phase system is Uo/U 300/500 volts. In a direct current system max operating voltage is Uo/U 413/825 volts. Outdoor use is permitted only for a short time. They are ozone resistant, oil & fat resistant.

Standard and Approval

NF C 32-102-4, CE low voltage directive 73/23/EEC & 93/68/EEC., IEC 60245-4, ROHS compliant

Cable Construction


- Fine bare copper strands
 - Strands to VDE-0295 Class-5, IEC 60228 Class-5
 - Rubber core insulation EI4 to VDE-0282 Part-1
 - Color code VDE-0293-308 and HD 186
 - Green-yellow grounding, 3 conductors and above
 - Polychloroprene rubber (neoprene) jacket EM3
-

Technical Characteristics


- Working voltage: 300/500 volts
 - Test voltage: 2000 volts
 - Flexing bending radius: 8 x Ø
 - Fixed bending radius: 6 x Ø
 - Temperature range: -30° C to +60° C
 - Short circuit temperature: +200 ° C
 - Flame retardant: NF C 32-070
 - Insulation resistance: 20 MΩ x km
-



French Standard

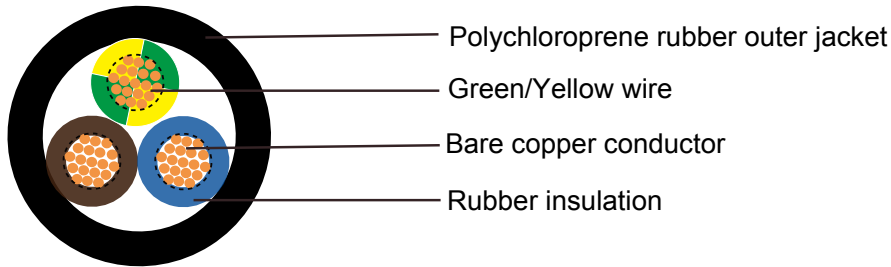

H05RR-F

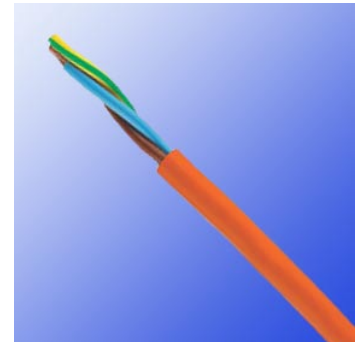

H05RR-F

Cable Parameter

| AWG | No. of Cores x Nominal Cross Sectional Area # x mm ² | Nominal Thickness of Insulation mm | Nominal Thickness of Sheath mm | Nominal Overall Diameter mm {min-max} | Nominal Copper Weight kg/km | Nominal Weight kg/km |
|-----------|--|---|---|--|--------------------------------------|----------------------------|
| 18(24/32) | 2 x 0.75 | 0.6 | 0.8 | 5.7-7.4 | 14.4 | 61 |
| 18(24/32) | 3 x 0.75 | 0.6 | 0.9 | 6.2-8.1 | 21.6 | 75 |
| 18(24/32) | 4 x 0.75 | 0.6 | 0.9 | 6.8-8.8 | 28.8 | 94 |
| 18(24/32) | 5 x 0.75 | 0.6 | 1.0 | 7.6-9.9 | 36.0 | 110 |
| 17(32/32) | 2 x 1 | 0.6 | 0.9 | 6.1-8.0 | 19.0 | 73 |
| 17(32/32) | 3 x 1 | 0.6 | 0.9 | 6.5-8.5 | 29.0 | 86 |
| 17(32/32) | 4 x 1 | 0.6 | 0.9 | 7.1-9.3 | 38.4 | 105 |
| 17(32/32) | 5 x 1 | 0.6 | 1.0 | 8.0-10.3 | 48.0 | 130 |
| 16(30/30) | 2 x 1.5 | 0.8 | 1.0 | 7.6-9.8 | 29.0 | 115 |
| 16(30/30) | 3 x 1.5 | 0.8 | 1.0 | 8.0-10.4 | 43.0 | 135 |
| 16(30/30) | 4 x 1.5 | 0.8 | 1.1 | 9.0-11.6 | 58.0 | 165 |
| 16(30/30) | 5 x 1.5 | 0.8 | 1.1 | 9.8-12.7 | 72.0 | 190 |
| 14(50/30) | 2 x 2.5 | 0.9 | 1.1 | 9.0-11.6 | 48.0 | 160 |
| 14(50/30) | 3 x 2.5 | 0.9 | 1.1 | 9.6-12.4 | 72.0 | 191 |
| 14(50/30) | 4 x 2.5 | 0.9 | 1.2 | 10.7-13.8 | 96.0 | 235 |
| 14(50/30) | 5 x 2.5 | 0.9 | 1.3 | 11.9-15.3 | 120.0 | 285 |